


## National Healthcare Facilities and Engineering Week Let's Celebrate! October 13-19, 2024

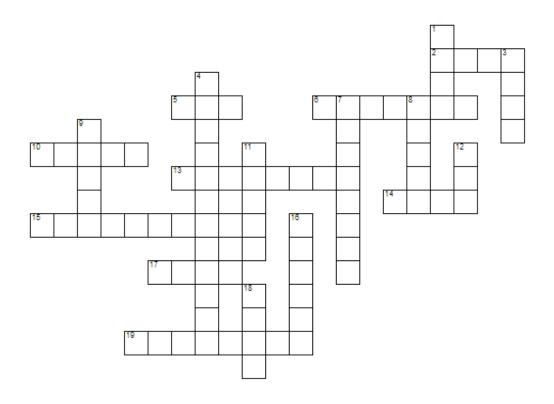

Α	C	R	O	S	S

High Efficiency Particulate Filter				
High Efficiency Particulate Filter				
Volatile Organic Compound.				
A device used with fluorescent and HID lamps to obtain the necessary circuit conditions for starting and operating				
Electrical phase B				
air volume systems				
CT Scanners emit radiation which is often contained by shielding.				
An area empty of people and clear of all activities other than occasional foot traffic				
Heating, Ventilation, and Air-Conditioning				
-7.5pa is the minimum recommended differential in accordance with standard Z317.13-17.				
Canadian Healthcare Engineering Society				
Anaesthetic Gas Scavenging System.				
Indoor air quality includes control of in the air				
An is an alteration to contract documents during the tender period.				
Class A is an care facility				
Copper shielding is used in MRI suites to protect from frequency interference.				
Light emitting				
Electrical phase A.				
Alterations to contract documents after award are known as orders.				
Electrical phase C.				